


# AS2 / MIKROS


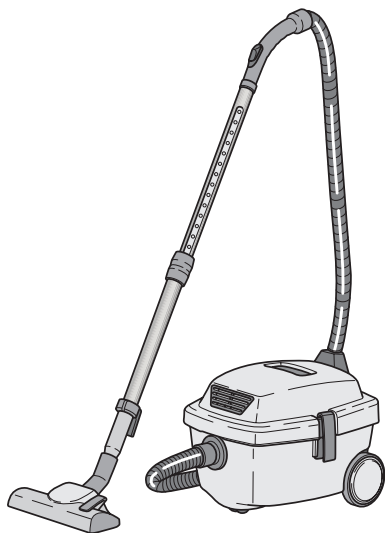


**EN** Use and Maintenance

**CE**

8050964  
ed. 09/2025



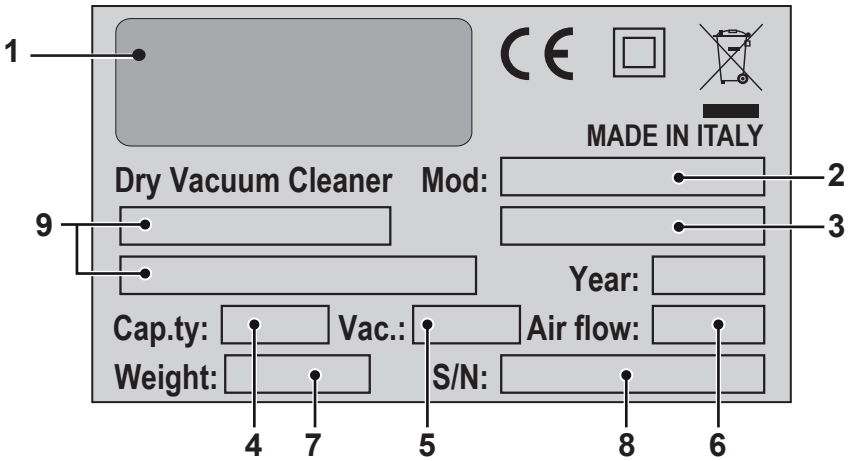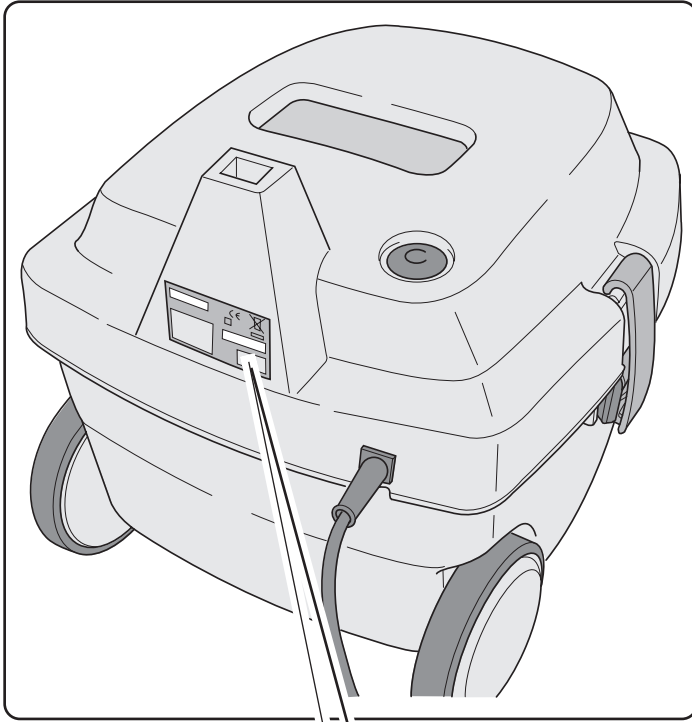

	1	2	3
IT	Produttore	Modello	Articolo
RN	Manufacturer	Model	Article
FR	Producteur	Modèle	Article
DE	Hersteller	Modell	Artikel
ES	Fabricante	Modelo	Artículo
PT	Produtor	Modelo	Artigo
NL	Producent	Model	Artikel
CS	Výrobce	Model	Typ
RU	Изготовитель	Модель	Артикул
PL	Producent	Model	Artykuł
AR	الصانع	الطرز	النوع

	4	5	6
IT	Capacità fusto	Capacità aspirazione	Portata d'aria
EN	Container capacity	Vacuum	Air flow
FR	Capacité de la cuve	Capacité d'aspiration	Débit d'air
DE	Fassungsvermögen des Körpers	Ansaugleistung	Luftdurchsatz
ES	Capacidad del bidón	Capacidad de aspiración	Caudal de aire
PT	Capacidade do reservatório	Capacidade de aspiração	Caudal de ar
NL	Inhoud reservoir	Zuigcapaciteit	Luchtdebiet
CS	Obsah nádoby	Sací výkon	Množství dopravovaného vzduchu
RU	Емкость бака	Мощность всасывания	Расход воздуха
PL	Pojemność zbiornika	Podciśnienie (mbar)	Przepływ powietrza
AR	سعة الخزان	قدرة الشفط	تدفق الهواء

	7	8	9
IT	Peso macchina	N° Matricola	Caratteristiche elettriche
EN	Machine weight	Serial N°	Electrical characteristics
FR	Poids machine	N° Matricule	Caractéristiques électriques
DE	Maschinengewicht	Matrikelnr.	Elektrische Eigenschaften
ES	Peso de la máquina	N° Matrícula	Características eléctricas
PT	Peso da máquina	Número de série	Características elétricas
NL	Machine gewicht	Serienummer	Elektrische eigenschappen
CS	Hmotnost stroje	Výrobní č.	Elektrické údaje
RU	Вес машины	Заводской №	Электрические характеристики
PL	Hmotnost stroje	Nr. Fabryczny	Właściwości elektryczne
AR	وزن الآلة	الرقم التسلسلي	المواصفات الكهربائية

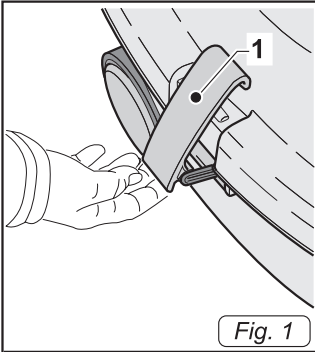


Fig. 1

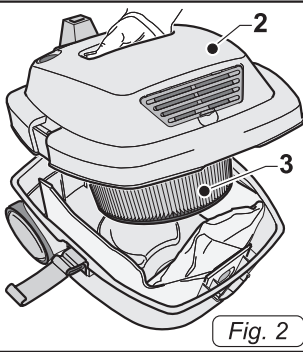


Fig. 2

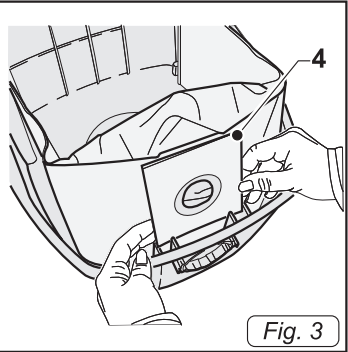


Fig. 3

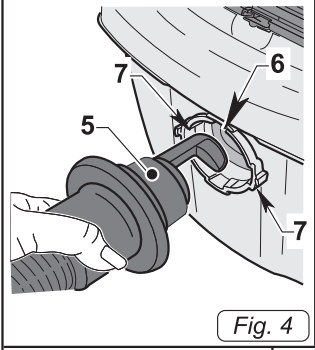


Fig. 4

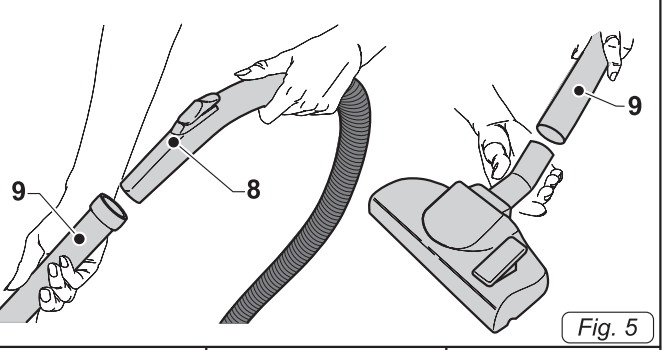


Fig. 5




Fig. 6




Fig. 7




Fig. 8




Fig. 9

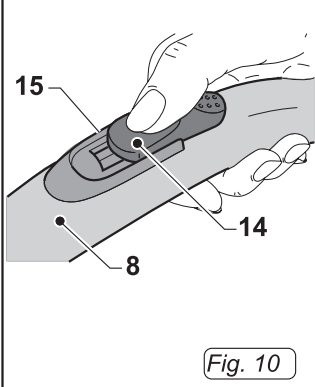


Fig. 10

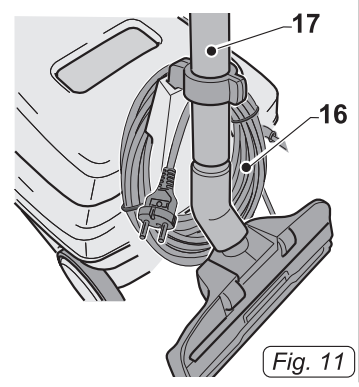


Fig. 11

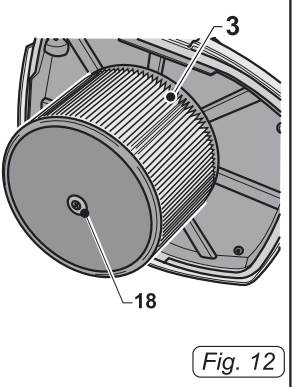


Fig. 12




Fig. 13




Fig. 14




Fig. 15





Fig. 16





English ..... ENGLISH - 1  
*(Translation of original instructions)*

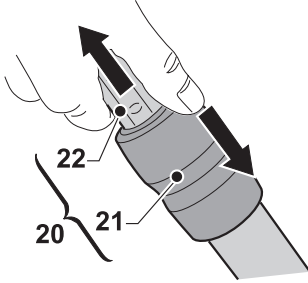

## TECHNICAL FEATURES

Tension.....	See data plate
Motor power .....	800 W
Noise level.....	62 dB(A)
Depression.....	230 mbar
Paper bag capacity .....	12 l
Dimensions .....	390 x 340 x 290H mm
Weight.....	4.6 kg
Accessories.....	Ø 32 mm

## TYPE OF USE

This unit must solely be used to vacuum dust, crumbs, etc. as it is designed solely for this purpose.



### HAZARD:

**The manufacturer cannot be held liable for any damage caused by improper or incorrect use.**

**Any other use relieves the Manufacturer from all responsibility of damage caused to persons and/or things and renders the warranty null and void.**

## INCORRECT USE

Do not use the unit to:

- vacuum any type of liquid;
- vacuum flammable, explosive, corrosive and toxic substances.
- vacuum hot substances.

Do not use the unit in explosive atmospheres.

## PREPARING THE UNIT

### Checking the filter systems

- Release the levers (1 Fig.1) and remove the cover (2 Fig.2) complete with the motor unit and cartridge filter (3 Fig.2).
- Check that the paper filter bag (4 Fig.3) is in place inside the device.

- If the paper filter bag (4 Fig.3) is not present, insert it by putting the square cardboard stiffener into the slot in the drum.
- Replace the cover and lock it using the levers (1 Fig.1).

### Assembling the pipes

- Insert the sleeve with bayonet connection (5 Fig.4) into the hole (6 Fig.4) in the container, aligning the connections present in the sleeve with the slots (7 Fig.4) in the hole in the container, then rotate the sleeve clockwise to lock it.
- Hook the rigid extensions (8 Fig.5) to the ergonomic handle (9 Fig.5) of the flexible pipe.
- Attach the desired accessory (floor tool, dusting brush, crevice tool, multi-purpose brush etc.) to the suction tube (9 Fig.5)

### Using the telescopic tube

- The length of the telescopic tube (20 Fig. 16) can be adjusted as follows:
- To lengthen the tube, press down on the ring nut (21 Fig. 16) and simultaneously extract the top part (22 Fig. 16) of the tube. Once the required length has been obtained, release the ring nut (21 Fig. 16) the tube will lock into the nearest locking position;
- To shorten the telescopic tube, use one hand to push the ring nut (21 Fig. 16) down and the other to reinsert the top tube (22 Fig. 16) into the lower sleeve (23 Fig. 16).

### Multi-purpose brush

The multi-purpose brush should be used as follows:

- To clean hard floors, parquet etc. press the lever back (10 Fig.6) to remove the bristles from the brush.
- To vacuum on carpets, rugs etc. press the lever forward (10 Fig.6) to retract the brush bristles.

## USING THE UNIT

- The appliance is fitted with wheels and can therefore be pulled along during use using the hose.
- To lift it up, use the handle (11 Fig.7) on the top of the cover. Starting up the appliance

### Starting-up the unit

- Insert the plug (12 Fig.8) into the socket.
- Press the switch (13 Fig.9). The appliance starts up.



#### **NOTE:**

You can adjust the suction force by sliding the selector (14 Fig.10) found on the ergonomic handle (8 Fig.10).

The suction force is decreased by opening the window (15 Fig.10)

### Turning the unit off

- Press the switch (13 Fig.9) to switch off the appliance.
- Remove the plug (12 Fig.8) from the socket.
- Wind up the cable (16 Fig.11) and hook it into position then attach the suction tube (17 Fig.11) in position

## CLEANING AND MAINTENANCE



#### **HAZARD:**

The plug must be removed from the socket before any maintenance procedure is implemented.

### Removing and replacing the paper filter bag

- Release the levers (1 Fig.1) and remove the cover (2 Fig.2) complete with the motor and the cartridge filter (3 Fig.2).
- Remove the paper filter bag (4 Fig.3) and replace as indicated above.
- Reassemble everything proceeding in reverse order.

### Checking and cleaning the filter cartridge

- Release the levers (1 Fig.1) and remove the cover (2 Fig.2) complete with the motor cartridge filter (3 Fig.2).
- Unscrew the central screw (18 Fig.12) and remove the cartridge filter (3 Fig.12).
- Clean the filter (3 Fig.13) from the inside out with a jet of air. If this is too dirty, it must be changed.
- Remount all the parts by following the reverse procedure of the dismantling process.

### Checking the exhaust air filter

- Release the filter (19 Fig.14) and remove it from the appliance.
- Make sure the filter is not clogged. If it is too dirty, replace it.
- Remount all the parts by following the reverse procedure of the dismantling process.

### Cleaning the unit body

- Clean the unit body with a cloth dampened with water or a neutral detergent.



#### **HAZARD:**

Do not wash the unit with jets of water.

## SPARE PARTS

Pack 5 paper filter bags	Code MK-042
Cartridge filter	Code MK-016
HEPA Filter	Code MK-041

<b>PROBLEM</b>	<b>CAUSE</b>	<b>REMEDY</b>
Vacuum cleaner does not work.	Switch is not pressed. Plug is not inserted. Power cut.	Press the switch. Insert the plug into the socket. Check the power line.
Unsatisfactory suction.	Paper bag is full. Filter components are clogged. Clogged accessories or pipes.	Replace the dust bag. Clean the filter components. Check and clean the flexible pipe and the suction outlet.

DEALER



**Riello Cleaning Machines S.p.A.**

Registered Office

Via Enrico Fermi, 43 - 37136 Verona (VR) - Italy

Headquarters

Via Circonvallazione, 5 - 27020 Dorno (PV) - Italy

P. +39 0382 848811 - F. +39 0382 84668 - M. info@riellocm.com



[ghibli.com](http://ghibli.com) - [wirbel.it](http://wirbel.it)

